


■ Exclusive **Précontraint® Ferrari®** technology




Made using the exclusive patented Ferrari® Précontraint® technology, Précontraint® 502 textiles are manufactured under equal tension throughout the manufacturing cycle.

The result of that is — exceptional dimensional stability — perfect tensioning and finish — shape that is retained at installation and over time — long-lasting mechanical resistance — substantially extended lifespan — exceptional flexibility that ensures architectural freedom and ease of fitting.

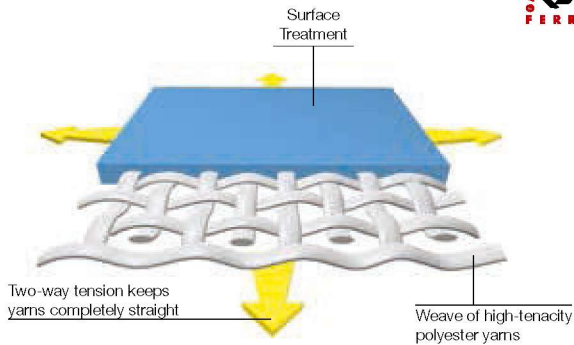




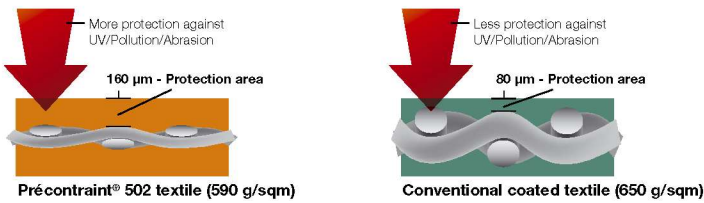




Greater coating thickness over the surface of the yarns



Thicker coating on the thread crests ensures that the physical properties of Ferrari® Précontraint® membranes are preserved over time – a key factor in the durability of your projects.



■ Technical features

PRECONTRAINTE® **502**

 Long life	 Tear resistance	 Dimensional stability	 UV resistant	 Won't sag
 Easy maintenance	 Flexibility	 Flame retardant	 Thermal comfort	 Graphic Customization

 Creative Freedom	 100% recyclable textile
--	--

■ Solar and light properties (according to EN 14501)

Reference	TS	RS	AS
502-1013	10	61	29
502-1125	4	21	75
502-1499	4	48	48
502-2012	4	44	52
502-2135	7	58	35
502-2136	2	15	83
502-2137	6	22	72
502-2138	4	36	60
502-2141	8	52	40
502-2144	7	66	27
502-2145	7	57	36
502-2148	4	30	66
502-2149	3	24	73
502-2150	11	46	43
502-2151	8	60	32
502-2152	9	37	54
502-2156	4	15	81
502-2157	8	47	45
502-2158	4	34	62
502-2159	5	46	49
502-2160	5	35	60
502-2161	6	28	66
502-2162	6	25	69
502-2163	5	48	47
502-2164	7	50	43
502-2165	15	29	56
502-2166	12	56	32
502-2167	2	29	69
502-2168	1	43	56
502-2171	4	48	48
502-2172	12	47	41
502-2173	12	42	46
502-8056	3	20	77
502-8102	10	76	14
502-8204	16	41	43
502-8255	20	37	43
502-8284	6	24	70
502-8341	10	68	22
502-8450	2	19	79
502-8861	7	61	32

TS : Solar Transmission as a %
RS : Solar Reflection as a %

AS : Solar Absorption as a %
TS + RS + AS = 100% of the incident energy